



CORAL
indiana line



SUONO PURO

75

NASCE CORAL ELECTRONIC

I prodotti Coral sono il frutto di anni di progettazione, sviluppo e messa a punto. Gli importanti riconoscimenti ricevuti nel corso del tempo hanno permesso a Coral di diventare un punto di riferimento per tutti gli appassionati di alta fedeltà. Coral è da sempre sinonimo di ottime prestazioni acustiche applicate al complesso mondo dell'hi-fi car.

CORAL ELECTRONIC START-UP

The Coral products are the result of years of design, development and fine tuning. The important awards received over the years have allowed the company to become a reference point for all high-fidelity enthusiasts. Coral has always been synonymous with excellent acoustic performances applied to the complex hi-fi car world.

77

NASCE INDIANA LINE

Indiana Line è rimasta sempre fedele alla sua filosofia: realizzare componenti hi-fi razionali, con prestazioni che vanno ben oltre le loro caratteristiche nominali. Senza cercare soluzioni per impressionare al momento, ma eleganti forme senza tempo, i diffusori acustici Indiana Line sono creati per offrire il massimo delle prestazioni per decenni.

INDIANA LINE START-UP

Indiana Line always remained true to its philosophy: to produce rational hi-fi components, with performances that go well beyond their rated characteristics. Without seeking solutions to impress at the moment but elegant timeless shapes, the Indiana Line loudspeakers are designed to provide maximum performances for decades.

06

CORAL ELECTRONIC ACQUISISCE INDIANA LINE

Dall'esperienza maturata in oltre quarant'anni dai due storici marchi nasce un nuovo gruppo, leader italiano nel mondo degli altoparlanti. Questa importante tappa segna l'evoluzione dell'azienda e ne amplia l'offerta, mantenendo intatto lo spirito originario: realizzare eccellenti prodotti dall'invidiabile competitività.

CORAL ELECTRONIC ACQUIRES INDIANA LINE

A new group is born from the experience gained in over forty years by the two historical brands: there is a new Italian leader in the loudspeakers' world. This milestone marks the company evolution and broadens its offer, keeping intact the original spirit: to produce excellent and competitive products.

19



DIVA


I diffusori acustici della serie Diva garantiscono le prestazioni necessarie a soddisfare le esigenze di fedeltà, dinamica e tenuta in potenza richieste dalle più recenti tecniche di registrazione, per ricreare nel vostro ambiente d'ascolto le avvincenti emozioni di un concerto dal vivo o gli effetti speciali di un film d'azione. Ma sono soprattutto caratterizzati dalla invidiabile definizione e naturalezza nella riproduzione della voce.

The Diva series loudspeakers warrant the performances needed to meet the musical quality precision, dynamic range and power handling capability required by the most advanced recording techniques, recreating in your listening room the engaging emotions of a live concert as well the special effects of an action movie. But they are mainly characterized by remarkable definition and naturalness in the voice reproduction.



I tweeter Diva sono montati sul diffusore tramite un guscio di disaccoppiamento in gomma morbida, che rende virtualmente "flottante" il componente: si ottiene così una sensibile riduzione delle vibrazioni trasmesse dal mobile al tweeter stesso. La corretta escursione della cupola è controllata da una camera di risonanza radiale, provvista di due diversi tipi di assorbente acustico, inseriti sotto la cupola ed all'interno dell'anello di ventilazione.

Diva tweeter is uncoupled from the enclosure through a soft rubber shell, which makes it a virtually "floating" component: in this way we obtain an important reduction of the vibrations sent from the cabinet to the tweeter. The proper excursion of the dome is controlled by a radial resonance chamber, provided with two different types of acoustic damper, placed under the dome and inside the venting ring.

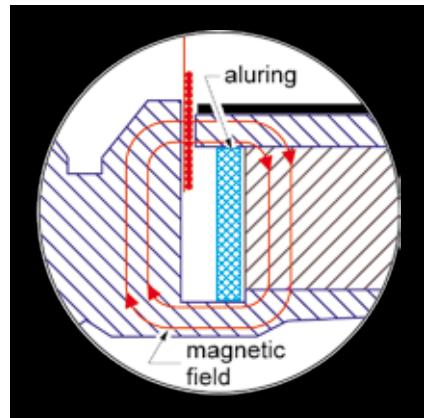

Per i coni dei mid-woofer abbiamo scelto il Curv: un materiale rigido, leggero e smorzato, realizzato con puro polipropilene estruso, tessuto e trattato termicamente. Il complesso magnetico è dotato di Aluring: un anello di corto circuito che riduce la non linearità tipica dei sistemi tradizionali, aumentando l'escursione controllata della bobina mobile.

For the mid-woofer cones we chose the Curv: a rigid, light and damped material, made with pure polypropylene extruded, woven and heat treated. Furthermore, we have equipped the magnetic circuit with Aluring: an aluminium short circuit ring that reduces the non-linearity, which affects all the commonly made magnet systems, increasing the voice coil controlled excursion capability.





DIVA 660

floor-standing loudspeaker
3-way, bass-reflex
30 ÷ 170 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
35 ÷ 22000 hertz response
92 dB (2.83 V / 1 m) sensitivity
2 x 180 mm woofer
140 mm midrange
26 mm dome tweeter
300/2800 hertz crossover
230 x 950 x 300 mm (including feet)
17.2 kg weight
• bi-wiring / bi-amping terminals
• decoupling feet

- BLACK high gloss lacquering



DIVA 650

floor-standing loudspeaker
3-way, bass-reflex
30 ÷ 150 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
38 ÷ 22000 hertz response
91 dB (2.83 V / 1 m) sensitivity
2 x 140 mm woofer
140 mm midrange
26 mm dome tweeter
300/2800 hertz crossover
205 x 930 x 260 mm (including feet)
13.5 kg weight
• bi-wiring / bi-amping terminals
• decoupling feet

- BLACK high gloss lacquering



Numerosi pannelli di rinforzo, con sagomatura particolare, sono adeguatamente posizionati all'interno di Diva 650 e Diva 660, per garantire sia la rigidità del mobile che l'abbattimento di eventuali onde stazionarie. Il volume è diviso in due sezioni: la parte alta è chiusa, per controllare l'escursione del midrange, mentre il volume inferiore è caricato con un condotto reflex a doppia svasatura, per fornire le massime prestazioni alle basse frequenze. Per garantire un efficace disaccoppiamento dal pavimento, i piedini in alluminio pressofuso sono dotati di tamponi anti-vibrazioni in gomma.

Several peculiarly shaped internal reinforcement boards are properly placed inside Diva 650 and Diva 660 to ensure both the rigidity of the enclosure and the reduction of possible stationary waves. The volume is cut in two separate sections: the upper one is closed to control the midrange excursion while the second volume features a double flare vent to reach greatest performance at low frequencies. To ensure an effective decoupling from the floor, the die-cast aluminium feet are equipped with anti-vibration rubber pads.





DIVA 552

floor-standing loudspeaker

3-way, bass-reflex

30 ÷ 130 watt suggested amplifier

4 ÷ 8 ohm amplifier load impedance

40 ÷ 22000 hertz response

90 dB (2.83 V / 1 m) sensitivity

140 mm woofer

140 mm mid-woofer

26 mm dome tweeter

300/2800 hertz crossover

160 x 825 x 240 mm - 12.1 kg

• bi-wiring / bi-amping terminals

• BLACK high gloss lacquering

DIVA 262

book-shelf loudspeaker

2-way, bass-reflex

30 ÷ 120 watt suggested amplifier

4 ÷ 8 ohm amplifier load impedance

44 ÷ 22000 hertz response

91 dB (2.83 V / 1 m) sensitivity

173 mm mid-woofer

26 mm dome tweeter

1900 hertz crossover

200 x 400 x 310 mm - 8.7 kg


• bi-wiring / bi-amping terminals

• BLACK high gloss lacquering



I diffusori della serie Diva sono dotati di terminali adatti al collegamento bi-amping / bi-wiring.

The Diva series loudspeakers are equipped with terminals suitable for bi-amping / bi-wiring linking.



È possibile interfacciare il livello delle basse frequenze con le caratteristiche della stanza, semplicemente inserendo nel condotto reflex il tampone in dotazione a DIVA 252 e 752.

You can tune the low frequencies with the room acoustics, simply by fitting into the reflex vent the foam plug supplied with DIVA 252 and 752.



DIVA 252

book-shelf loudspeaker

2-way, bass-reflex

30 ÷ 100 watt suggested amplifier

4 ÷ 8 ohm amplifier load impedance

48 ÷ 22000 hertz response

90 dB (2.83 V / 1 m) sensitivity

140 mm mid-woofer

26 mm dome tweeter

2900 hertz crossover

160 x 280 x 275 mm - 5.3 kg

• bi-wiring / bi-amping terminals

• foam plug supplied

• BLACK high gloss lacquering



DIVA 752

centre channel loudspeaker

2-way, bass-reflex

30 ÷ 140 watt suggested amplifier

4 ÷ 8 ohm amplifier load impedance

50 ÷ 22000 hertz response

91 dB (2.83 V / 1 m) sensitivity

2 x 140 mm mid-woofer

26 mm dome tweeter

2200 hertz crossover

420 x 160 x 270 mm - 7.8 kg

• foam plug supplied

• BLACK high gloss lacquering



T E S I

L'elevata definizione e naturalezza nella riproduzione delle voci, unite alla risposta ai transienti veloce e precisa, caratterizzano i diffusori della linea Tesi. La loro considerevole capacità dinamica si somma ai bassi caldi e corposi. I woofer utilizzano coni in polipropilene rinforzato con mica e rifasatori centrali per migliorare risposta e dispersione alle medie frequenze. I tweeter utilizzano cupole di seta molto leggera, potenti magneti al neodimio ed un'esclusiva camera di risonanza posteriore.

The remarkable definition and naturalness in the voice reproduction, combined with fast and accurate transient response, characterize the Tesi line loudspeakers. Their considerable dynamic capability is added to the warm and full-bodied basses. The woofers feature special polypropylene cones stiffened with mica and central phase plugs, to improve response and dispersion at the medium frequencies. The tweeters use lightweight silk dome, powerful neodymium magnets and an exclusive rear chamber.





Tesi 661 è dotato di piedini in alluminio pressofuso con tamponi anti-vibrazioni in gomma, per garantire un efficace disaccoppiamento dal pavimento.

Tesi 661 is equipped with die-cast aluminum feet with anti-vibration rubber pads, to ensure an effective decoupling from the floor.

TESI 661

floor-standing loudspeaker

3-way, bass-reflex

30 ÷ 160 watt suggested amplifier

4 ÷ 8 ohm amplifier load impedance

35 ÷ 22000 hertz response

92 dB (2.83 V / 1 m) sensitivity

2 x 160 mm woofer

160 mm mid-woofer

26 mm dome tweeter

400/3000 hertz crossover

180 x 925 x 300 mm - 14.1 kg

• bi-wiring / bi-amping terminals

• BLACK OAK / WALNUT vinyl

TESI 561

floor-standing loudspeaker

3-way, bass-reflex

30 ÷ 150 watt suggested amplifier

4 ÷ 8 ohm amplifier load impedance

35 ÷ 22000 hertz response

92 dB (2.83 V / 1 m) sensitivity

160 mm woofer

160 mm mid-woofer


26 mm dome tweeter

180/2800 hertz crossover

180 x 890 x 300 mm - 13.7 kg

• bi-wiring / bi-amping terminals

• BLACK OAK / WALNUT vinyl



Inserendo nel condotto reflex il tampono in dotazione a TESI 241 e TESI 761, è possibile interfacciare le basse frequenze con la stanza.

By fitting the foam plug supplied with TESI 241 and TESI 761 into the reflex vent, you can tune the low frequencies with the room.



TESI 261

book-shelf loudspeaker
2-way, bass-reflex
30 ÷ 120 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
45 ÷ 22000 hertz response
91 dB (2.83 V / 1 m) sensitivity
160 mm mid-woofer
26 mm dome tweeter
2500 hertz crossover
180 x 362 x 275 mm - 5.8 kg

TESI 241

book-shelf loudspeaker
2-way, bass-reflex
30 ÷ 80 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
58 ÷ 22000 hertz response
90 dB (2.83 V / 1 m) sensitivity
120 mm mid-woofer
26 mm dome tweeter
2700 hertz crossover
140 x 245 x 180 mm - 2.5 kg
• foam plug supplied

TESI 761

centre channel loudspeaker
2-way, bass-reflex
30 ÷ 140 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
45 ÷ 22000 hertz response
93 dB (2.83 V / 1 m) sensitivity
2 x 160 mm mid-woofer
26 mm dome tweeter
2300 hertz crossover
460 x 180 x 240 mm - 7.3 kg
• foam plug supplied

• BLACK OAK / WALNUT vinyl

• BLACK OAK / WALNUT vinyl

• BLACK OAK vinyl



TESI HIGH GLOSS

L'elevata definizione e naturalezza nella riproduzione delle voci, unite alla risposta ai transienti veloce e precisa, caratterizzano i diffusori della linea Tesi. La loro considerevole capacità dinamica si somma ai bassi caldi e corposi. I woofer utilizzano coni in polipropilene rinforzato con mica e rifasatori centrali per migliorare risposta e dispersione alle medie frequenze. I tweeter utilizzano cupole di seta molto leggera, potenti magneti al neodimio ed un'esclusiva camera di risonanza posteriore. Un'accurata laccatura lucida impreziosisce i modelli della linea high-gloss.

The remarkable definition and naturalness in the voice reproduction, combined with fast and accurate transient response, characterize the Tesi line loudspeakers. Their considerable dynamic capability is added to the warm and full-bodied basses. The woofers feature special polypropylene cones stiffened with mica and central phase plugs, to improve response and dispersion at the medium frequencies. The tweeters use lightweight silk dome, powerful neodymium magnets and an exclusive rear chamber. The accurate lacquering makes precious the high-gloss line models.

indiana line

indiana line





TESI 542

floor-standing loudspeaker
3-way, bass-reflex
30 ÷ 120 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
38 ÷ 22000 hertz response
91 dB (2.83 V / 1 m) sensitivity
120 mm woofer
120 mm mid-woofer
26 mm dome tweeter
180/2700 hertz crossover
135 x 825 x 240 mm - 9.4 kg
• bi-wiring / bi-amping terminals

- WHITE high gloss lacquering



TESI 262


bookshelf loudspeaker
2-way, bass-reflex
30 ÷ 120 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
45 ÷ 22000 hertz response
91 dB (2.83 V / 1 m) sensitivity
160 mm mid-woofer
26 mm dome tweeter
2500 hertz crossover
175 x 340 x 300 mm - 5.9 kg

- WHITE high gloss lacquering



Tesi 542 è dotato di terminali adatti al collegamento bi-amping / bi-wiring.

Tesi 542 is equipped with terminals suitable for bi-amping / bi-wiring linking.



Inserendo nel condotto reflex il tampone in dotazione a TESI 242 e TESI 742, è possibile interfacciare le basse frequenze con la stanza.

By fitting the foam plug supplied with TESI 242 and TESI 742 into the reflex vent, you can tune the low frequencies with the room.



TESI 242

book-shelf loudspeaker
2-way, bass-reflex
30 ÷ 80 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
58 ÷ 22000 hertz response
90 dB (2.83 V / 1 m) sensitivity
120 mm mid-woofer
26 mm dome tweeter
2700 hertz crossover
135 x 230 x 195 mm - 2.5 kg

- *foam plug supplied*
- *hangable on wall*

• *WHITE high gloss lacquering*



TESI 742

centre channel loudspeaker
2-way, bass-reflex
30 ÷ 100 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
55 ÷ 22000 hertz response
92 dB (2.83 V / 1 m) sensitivity
2 x 120 mm mid-woofer
26 mm dome tweeter
2600 hertz crossover
350 x 135 x 240 mm - 5.0 kg

- *shielded loudspeakers*
- *foam plug supplied*

• *WHITE high gloss lacquering*



N O T A - X

I diffusori acustici della serie Nota X garantiscono le prestazioni necessarie a soddisfare le esigenze di fedeltà, dinamica e tenuta in potenza richieste dalle più recenti tecniche di registrazione, per ricreare nel vostro ambiente d'ascolto le avvincenti emozioni di un concerto dal vivo o gli effetti speciali di un film d'azione. L'ottimizzazione del processo di produzione ed il perfetto equilibrio di tutti i componenti hanno permesso lo sviluppo di questa gamma dall'ottimo rapporto prezzo/prestazioni.

The Nota X series loudspeakers ensure the performances needed to meet the musical quality level, dynamic range and power handling capability required by the most advanced recording techniques, recreating in your listening room the engaging emotion of a live concert as well the special effects of an action movie. An optimized production process and a perfect blend of all the components brought to life this range of loudspeakers with a very good price/performance ratio.



indiana line

indiana line



NOTA 550 X

floor-standing loudspeaker
3-way, bass-reflex
30 ÷ 130 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
38 ÷ 22000 hertz response
91 dB (2.83 V / 1 m) sensitivity
135 mm woofer
135 mm mid-woofer
26 mm dome tweeter
250/2800 hertz crossover
175 x 880 x 275 mm - 11.4 kg


- BLACK OAK / WALNUT vinyl



NOTA 260 X

bookshelf loudspeaker
2-way, bass-reflex
30 ÷ 100 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
44 ÷ 22000 hertz response
92 dB (2.83 V / 1 m) sensitivity
166 mm mid-woofer
26 mm dome tweeter
2600 hertz crossover
205 x 325 x 290 mm - 5.2 kg
• foam plug supplied

- BLACK OAK / WALNUT vinyl



Il livello delle basse frequenze dei diffusori Nota-X da scaffale può essere interfacciato con l'acustica della stanza inserendo nel condotto reflex il tampone di spugna in dotazione.

The low frequencies level of Nota-X bookshelves can be tuned with the acoustics of the room by fitting into the reflex vent the foam plug supplied.



NOTA 250 X

book-shelf loudspeaker
2-way, bass-reflex
30 ÷ 80 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
48 ÷ 22000 hertz response
90 dB (2.83 V / 1 m) sensitivity
135 mm mid-woofer
26 mm dome tweeter
2800 hertz crossover
175 x 285 x 255 mm - 3.4 kg
• *foam plug supplied*

• *BLACK OAK / WALNUT vinyl*

NOTA 240 X

book-shelf loudspeaker
2-way, bass-reflex
30 ÷ 60 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
54 ÷ 22000 hertz response
89 dB (2.83 V / 1 m) sensitivity
107 mm mid-woofer
26 mm dome tweeter
3000 hertz crossover
160 x 235 x 160 mm - 2.2 kg
• *foam plug supplied*
• *hangable on wall*

• *BLACK OAK / WALNUT vinyl*

NOTA 740 X

centre channel loudspeaker
2-way, bass-reflex
30 ÷ 100 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
60 ÷ 22000 hertz response
92 dB (2.83 V / 1 m) sensitivity
2 x 107 mm mid-woofer
26 mm dome tweeter
2600 hertz crossover
400 x 130 x 235 mm - 4.6 kg
• *shielded loudspeakers*
• *foam plug supplied*

• *BLACK OAK / WALNUT vinyl*



D J

DJ 308 e DJ 310, caratterizzati dall'elevata dinamica, sono il complemento ideale per le sorgenti digitali. La guida d'onda anteriore del tweeter domHorn fornisce l'ottima dispersione polare, insieme all'elevata efficienza. La camera di risonanza posteriore e la cupola in seta trattata garantiscono la grande velocità dei transienti, la buona dinamica e le alte frequenze cristalline.

DJ 308 and DJ 310 feature outstanding dynamics: the perfect match for digital sources. The design of the wave-guide front, exclusive of the domHorn tweeter, provides an excellent polar dispersion along with the high efficiency. The rear chamber and the treated silk dome warrant the speed transient and the crystal clear high frequencies.



D J 308

book-shelf loudspeaker

3-way, bass-reflex

30 ÷ 140 watt suggested amplifier

4 ÷ 8 ohm amplifier load impedance

40 ÷ 22000 hertz response

93 dB (2.83 V / 1 m) sensitivity

230 mm woofer

135 mm midrange

26 mm dome tweeter

500/3500 hertz crossover

270 x 550 x 285 mm - 9.5 kg

• shielded loudspeakers

• BLACK ASH vinyl



D J 310

book-shelf loudspeaker

3-way, bass-reflex

30 ÷ 160 watt suggested amplifier

4 ÷ 8 ohm amplifier load impedance

38 ÷ 22000 hertz response

94 dB (2.83 V / 1 m) sensitivity

275 mm woofer

135 mm midrange

26 mm dome tweeter

500/4000 hertz crossover

320 x 620 x 295 mm - 14.1 kg

• shielded loudspeakers

• BLACK ASH vinyl



BASSO

I modelli Basso sono subwoofer attivi dal sorprendente impatto acustico, nati per completare l'estensione alle basse frequenze dei sistemi home cinema. La completa sezioni controlli di cui sono dotati consente una perfetta interfaccia con gli altri componenti dell'impianto e con l'ambiente d'ascolto. Il design pulito e raffinato e le compatte dimensioni rendono agevole il loro inserimento in ogni ambiente.

Basso are active subwoofers with astonishing acoustic impact, they are suitable to complete the low frequency extension of home cinema systems. Their amplifiers feature a very complete control section, which allows a perfect interface with the other components of the system and with the listening room. The clean and elegant design makes placement easy with any kind of furnishing.



BASSO 922

active subwoofer
275 mm speaker diameter
twin reflex port
AB-Class amplifier
75/125 watt nominal/max power
29 ÷ 180 hertz frequency response
40 ÷ 180 hertz crossover frequency
220 ÷ 240 volt power supply
125 watt max power consumption
<0.5 watt stand-by consumption
310 x 330 x 335 (h) mm - 9.8 kg

- WHITE high gloss lacquering



BASSO 880

active subwoofer

275 mm speaker diameter

sealed cabinet

D-Class amplifier

250/400 watt nominal/max power

24 ÷ 180 hertz frequency response

40 ÷ 180 hertz crossover frequency

220 ÷ 240 volt power supply

300 watt max power consumption

<0.5 watt stand-by consumption

300 x 320 x 450 (h) mm - 13.4 kg

• BLACK matt vinyl

BASSO 840

active subwoofer

275 mm speaker diameter

twin reflex port

AB-Class amplifier

75/125 watt nominal/max power

30 ÷ 180 hertz frequency response

40 ÷ 180 hertz crossover frequency

220 ÷ 240 volt power supply

125 watt max power consumption

<0.5 watt stand-by consumption

300 x 320 x 385 (h) mm - 10.2 kg

• BLACK matt vinyl

MIO SUB

active subwoofer

178 mm speaker diameter

twin reflex port

AB-Class amplifier

50/80 watt nominal/max power

40 ÷ 180 hertz frequency response

40 ÷ 180 hertz crossover frequency




220 ÷ 240 volt power supply

80 watt max power consumption

<0.5 watt stand-by consumption

230 x 250 x 255 (h) mm - 5.9 kg

• BLACK matt vinyl

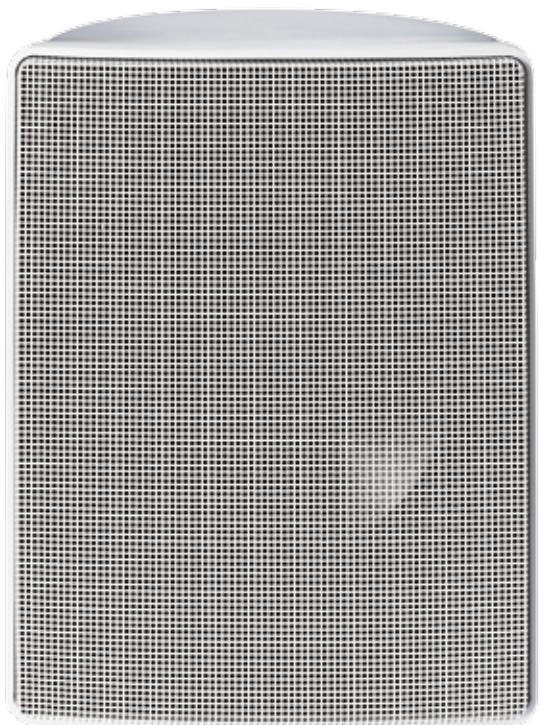

LUNA

Luna è un diffusore acustico due vie particolarmente adatto per la sonorizzazione di ambienti, anche di grandi dimensioni. Il woofer da 166 mm con cono in mica-polipropilene e l'elevata efficienza del tweeter consentono il raggiungimento della sua elevata dinamica. Le staffe fornite in dotazione permettono il fissaggio a parete con diverse angolazioni. Il box è realizzato con materiali resistenti all'umidità ed ai raggi del sole.

Luna is a two way loudspeaker, particularly suitable for sound distribution. The 166 mm woofer with mica-polypropylene cone and the high sensitivity of the tweeter make possible to reach its high dynamics. The brackets supplied with LUNA make the on-wall clamping easy with several angles. The box materials are humidity and UV rays resistant.

book-shelf loudspeaker

2-way, closed box

20 ÷ 80 watt suggested amplifier

4 ÷ 8 ohm amplifier load impedance

58 ÷ 22000 hertz response

92 dB (2.83 V / 1 m) sensitivity

166 mm mid-woofer

20 mm dome tweeter

4000 hertz crossover

180 x 240 x 160 mm - 2.3 kg

- aluminium grille

- ICE WHITE painting



NANO.2

Nano è un diffusore acustico molto compatto, adatto per piccoli impianti hi-fi e home cinema, effetti surround e sonorizzazione di ambienti. Utilizza un woofer da 100 mm con cono in polipropilene ed un ring dome tweeter da 24 millimetri con magnete in neodimio. Le staffe fornite in dotazione permettono il fissaggio a parete con diverse angolazioni.

Nano is a very compact speaker suitable to build small hi-fi stereo and home cinema systems, surround effects and sound distribution. It features a 100 mm woofer with polypropylene cone and a 24 mm ring dome tweeter. The brackets supplied with NANO make the on-wall clamping easy with several angles.

book-shelf loudspeaker
2-way, bass-reflex
20 ÷ 60 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
65 ÷ 22000 hertz response
90 dB (2.83 V / 1 m) sensitivity
100 mm mid-woofer
24 mm ring dome tweeter
5000 hertz crossover
120 x 190 x 122 mm - 1.6 kg

• shielded loudspeakers

• BLACK / ICE WHITE painting



IN WALL

I diffusori da incasso sono adatti alla realizzazione di impianti hi-fi stereo e home cinema, effetti surround e sonorizzazione di ambienti. Possono essere montati sia su pareti in muratura che su tramezzi o controsoffitti in cartongesso, senza l'uso di ulteriori accessori.

The in-wall speakers are suitable for hi-fi stereo and home cinema systems, surround effects and sound distribution. They can be easily installed on brick walls or directly on plasterboard walls without using additional accessories.

Tesi Q è realizzato con gli stessi componenti della serie Tesi, di cui mantiene lo stesso timbro. Può essere installato direttamente su pareti in cartongesso; per l'installazione su pareti di mattoni, si consiglia di utilizzare il box in legno fornito in dotazione.


Tesi Q is made with the same components of Tesi series, of which it keeps the same tonal balance. It can be installed directly on plasterboard walls; for installation on brick walls, we recommend using the back wood box supplied.



TESI Q

2-way, in-wall loudspeaker
30 ÷ 120 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
65 ÷ 22000 hertz response
90 dB (2.83 V / 1 m) sensitivity
160 mm midwoofer
26 mm dome tweeter
2500 hertz crossover

• back wood box supplied




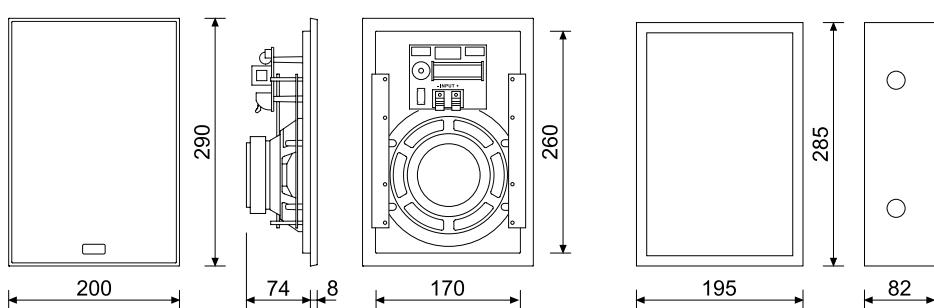




INC EILING

I diffusori da soffitto sono adatti alla sonorizzazione di locali di ogni dimensione. Notevole la loro facilità di montaggio su soffitti e pareti in cartongesso, senza l'uso di ulteriori accessori.

The ceiling loudspeakers are suitable for sound distribution on all size rooms. They can be easily installed on ceilings or walls in plasterboard, without using additional accessories.

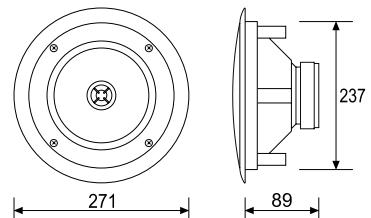

S Q 250

2-way, in-ceiling loudspeaker
20 ÷ 60 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
70 ÷ 22000 hertz response
90 dB (2.83 V / 1 m) sensitivity
130 mm mid-woofer
20 mm dome tweeter
3800 hertz crossover

R D 260

2-way, in-ceiling loudspeaker
20 ÷ 60 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
50 ÷ 22000 hertz response
92 dB (2.83 V / 1 m) sensitivity
165 mm mid-woofer
24 mm ring tweeter
4000 hertz crossover

R D 280



2-way, in-ceiling loudspeaker
20 ÷ 70 watt suggested amplifier
4 ÷ 8 ohm amplifier load impedance
48 ÷ 22000 hertz response
93 dB (2.83 V / 1 m) sensitivity
210 mm mid-woofer
24 mm ring tweeter
4000 hertz crossover



MONZA

I componenti della linea Monza offrono prestazioni eccellenti, unite alla semplicità di installazione. I coni in mica-polipropilene, le sospensioni in gomma a doppia onda e l'elevato flusso dei complessi magnetici forniscono una risposta estesa e lineare, elevata velocità e controllo dei transienti, oltre a trasparenza e neutralità timbrica.

The Monza line components supply excellent performance, together with an easy installation. The mica-polypropylene cones, the double-roll surrounds and the high flux of the magnet systems supply linear response, high velocity and absolute control of the transient, along with sound transparency and tonal balance.





M C 130

130 mm coaxial loudspeaker
120 watt max power
60 watt nominal power
4 ohm nominal impedance
 $50 \div 20000$ hertz response
92 dB sensitivity (2.83 V / 1 m)
mica-polypropylene injection cone
treated silk dome neodymium tweeter

M C 165

166 mm coaxial loudspeaker
160 watt max power
80 watt nominal power
4 ohm nominal impedance
 $50 \div 20000$ hertz response
92 dB sensitivity (2.83 V / 1 m)
mica-polypropylene injection cone
treated silk dome neodymium tweeter



MK 130

2-way, stereo loudspeaker kit
 200 watt max power
 100 watt nominal power
 4 ohm nominal impedance
 $60 \div 20000$ hertz response
 92 dB sensitivity (2.83 V / 1 m)
 130 mm woofer diameter (MW 130)
 mica-polypropylene injection cone
 49 mm neodymium tweeter (MT 25)
 treated silk dome, 26 mm voice coil
 3100 hertz crossover frequency
 3-steps changeable tweeter level
 hi-frequency electronic power control

MK 165

2-way, stereo loudspeaker kit
 240 watt max power
 120 watt nominal power
 4 ohm nominal impedance
 $50 \div 20000$ hertz response
 92 dB sensitivity (2.83 V / 1 m)
 166 mm woofer diameter (MW 165)
 mica-polypropylene injection cone
 49 mm neodymium tweeter (MT 25)
 treated silk dome, 26 mm voice coil
 3100 hertz crossover frequency
 3-steps changeable tweeter level
 hi-frequency electronic power control



Coral Electronic and Indiana Line are brands of
Coral Electronic srl - 10098 Rivoli - Torino - Italy
info@coralelectronic.com

www.indianaline.it - www.coralelectronic.com

Decliniamo ogni responsabilità per eventuali errori o imprecisioni. Ci riserviamo il diritto di modificazioni senza preavviso.
We reserve the right to change specifications without notice. We decline every liability for any mistake or inaccuracy.





CORAL
indiana line